

Product Datasheet



The global certified TLD-600-C is a dual stage extremely wide input smart LED driver. 10kV surge protection level, 100khour long life and 7-year warranty provide high confidence to luminaire users. It supports not only traditional 4-in-1 control, but also DALI2.0 and other protocols. NFC and cable programming are both available for users. All around protections including digital OTP (internal and external by NTC) with auto-recovery secure 24hour non-stop operation for luminaires.

- Horticultural
- Stadium
- Flood
- Harbor
- UV
- Fishing



- Features2
- Model List2
- Technical Data3
- Safety/EMC Compliance4
- Dimming4
- Programming6
- Lifetime vs. Case Temperature8
- Power Factor vs. Load8
- THD vs. Load9
- Efficiency vs. Load (14A Model)9
- Inrush Current10
- Dielectric Strength10
- Tc Point10
- Packaging Information11
- Mechanical Design12
- Output Operation Range21
- Revision History23

■ Features

- Absolute Supply Voltage: 200-528Vac or 250-740Vdc
- Great Surge Immunity 10kV
- 96% Efficiency Max.
- Customized Endcap
- Low Inrush Current
- Active Daisy Chain and Master Mode
- 100,000Hour Life @ Tc=75°C
- 7 Year Warranty @ Tc<=75°C
- Airset™ NFC Programmability
- +/-2% Output Current Accuracy
- Isolated 0-10V/PWM/Time/DALI2.0 Dimmable
- Dim Off with 1.5W Standby Power
- 12V 300mA Auxiliary Power to Power Controllers and Fans (Optional)
- UL Class P, ENEC/CB/CCC SELV Output
- Global Certified Model Available
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384

■ Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max	Certification
TLD-600-C14A-XYZ	180-528Vac	600 W	30-55Vdc	11A	14A	UL/FCC/ENEC/CCC /CB/RCM/ EAC/CE
TLD-600-C860-XYZ	180-528Vac	600 W	42-100Vdc	6A	8.6A	
TLD-600-C600-XYZ	180-528Vac	600 W	60-143Vdc	4.2A	6A	
TLD-600-C420-XYZ	180-528Vac	600 W	86-214Vdc	2.8A	4.2A	
XY=	Dimming Method	Programmable	12Vaux	Dim-off		
NN	-	-	-	-		
DN	0-10V	Cable	-	-	No Dim-off as default status, programmed to have Dim-off	
EN	0-10V	Cable	300mA	√		
TR	Time/Set Current	NFC Wireless	-	-		
DR	0-10V	NFC Wireless	-	-	No Dim-off as default status, programmed to have Dim-off	
ER	0-10V/PWM/Time	NFC Wireless	300mA	√		
AR	DALI2.0	NFC Wireless	-	√		

Z = U, UL cable with ground wire (green) **S**, VDE cable/Class I **D**, VDE cable/Class II

Note: See the **Output Operation Range Section** for programmable model details

■ Technical Data

Input Voltage	180-528Vac or 250-740Vdc
Input Frequency	47~63Hz
Power Factor	>0.9@60-100%load, refer to PF vs. Load curve
THD	<15%@60-100%load, refer to THD vs. Load curve
Input Current	2.5Amax@277Vac & Full-Load, 1.4Amax@480Vac & Full-Load
Inrush Current	See Inrush Current Section in the datasheet
Leakage Current	1mA max @277Vac 60Hz, UL8750,0.75mA max @220Vac 50Hz, IEC61347-1
Input Under Voltage	Shut down and auto-restart
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Current Accuracy	±2%Io for programmable model, ±5%Io for non-programmable model
Ripple Current	Ip-p:5%Io max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	110% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \geq 105 \pm 10^\circ\text{C}$; Auto Recovery When $T_c \leq 70 \pm 10^\circ\text{C}$
Auxiliary Power (Vaux)	12V+/-5%, 300mA max
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH~100%RH
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$; 5%RH~100%RH
MTBF	$\geq 320,000$ hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	$\geq 100,000$ hours, 75°C case temperature, refer to life vs. T_c curve
Case Temperature	90°C max, marked in the T_c point of label
Dimensions	9.33x4.92x1.93 by inch (body), 10.3x4.92x1.93 by inch (endcaps included) 237 x 125 x 49 by mm (body), 262 x 125 x 49 by mm (endcaps included)
Net Weight	2600g
Packing	See Package Information Section in the datasheet

Notes: Unless specified, all the test results are measured in 25°C room temperature.

Safety/EMC Compliance

Safety Standard	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012	Power units other than class 2
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
EMI Standards	Description
IEC 55015	Conducted emission test & radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
EMS Standards	Description
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment


Dimming

Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	100uA	150uA	200uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	10% (Vdim=1V)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	10% (Duty=10%)	Linear	100% (Duty=90-100%)
Dim off threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Dim on threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3.8V		10V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
External PWM Controller Current Sinking Capability	300uA		
DALI Interface Standard	IEC62386, part 101,102,207		
DA1,DA2 High Level	9.5	16	22.5
DA1,DA2 Low Level	-6.5	0	6.5
DA1,DA2 Current	0		2mA


- Dimming Curve

a. Without dim-off

0-10V Dimming Curve

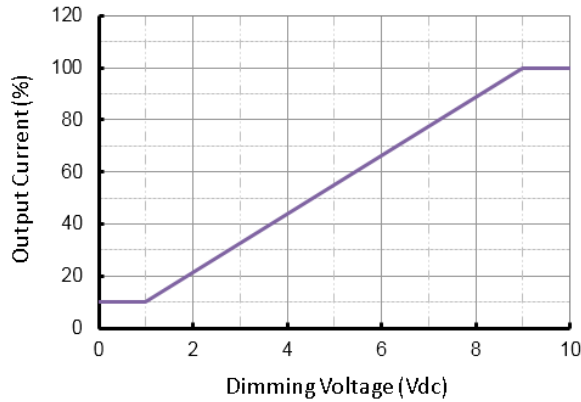


PWM Dimming Curve

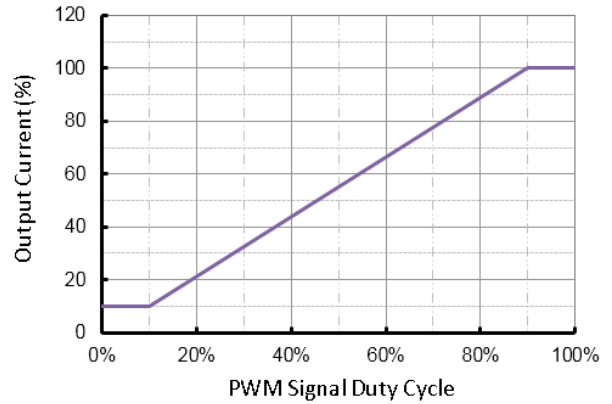


b. With dim-off


0-10V Dimming Curve

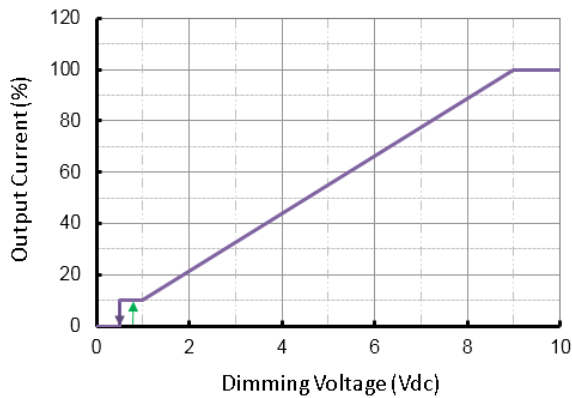

PWM Dimming Curve

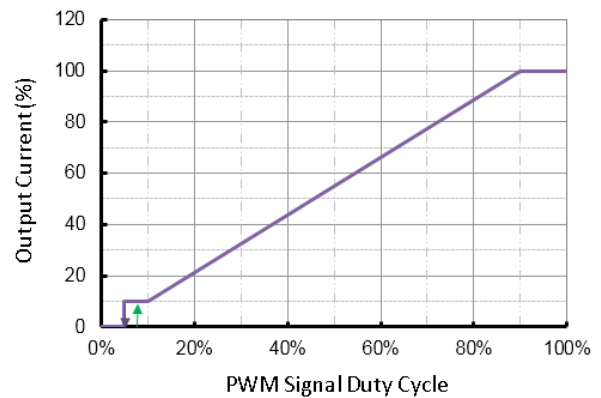

- Dimming Wiring


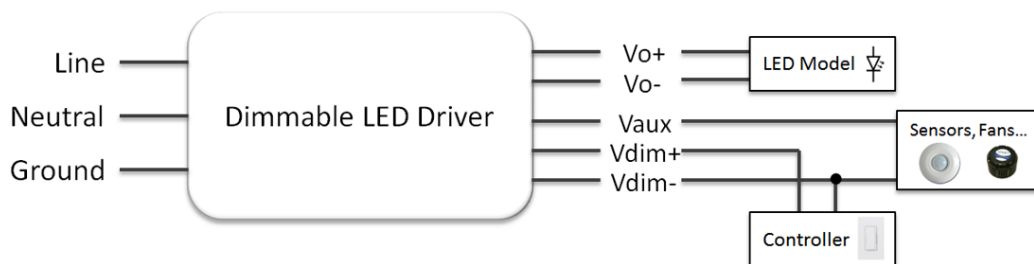


■ Programming

- NFC Programming by PC/Laptop




- Download PC Software at <https://www.upowertek.com/download-2/>
- Click Upowertek Programming Utility.exe
- The GUI start and notify you the programming mode (cable programming or NFC programming)
- Click "NFC" button if it's not NFC programming mode.

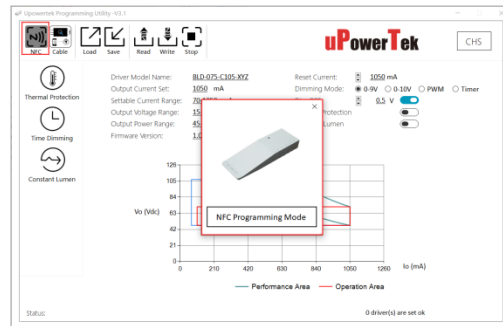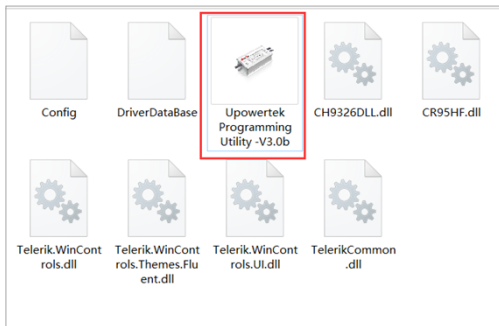

- NFC Programming by Smartphone


- Download Android APP at <https://www.upowertek.com/download-2/>
- Only available on Android cellphone (iPhone is not supported)
- The cellphone should have NFC function and make sure it is enabled.

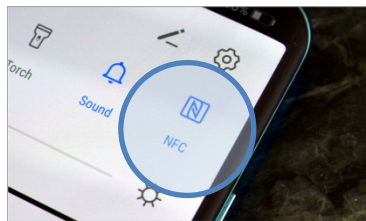

- Turn on NFC switch of cellphone, then open the APP by icon below.





uPowerTek
Airset

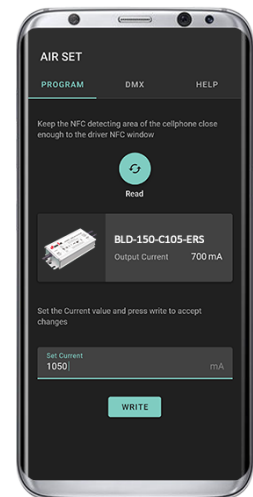

- Cable Programming



- Download PC Software at <https://www.upowertek.com/download-2/>
- Click Upowertek Programming Utility.exe
- The GUI start and notify you the programming mode (cable programming or NFC programming)

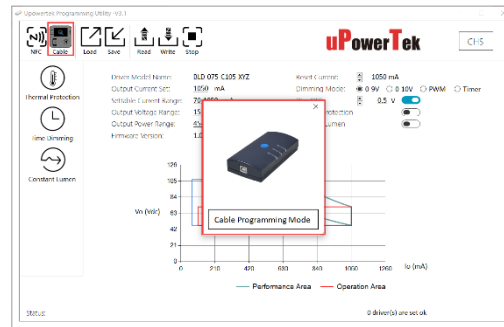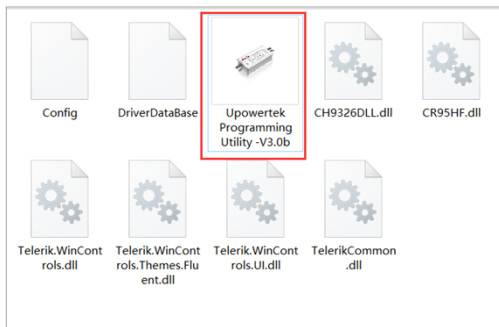


- Click "Cable" button if it's not cable programming mode.
- Connect the Vdim+ and Vdim- wires to the right ones (the same color) of the programmer.

- Please contact with us for product user manual and more information such as:


- Output Lumen Compensation
- Luminaire Thermal Protection by External NTC (with extra cable)
- Dimming Curve Customization (dim off threshold, minimum dimming level, maximum dimming voltage etc.)
- Adjustable Startup Time
- Time Dimming (adaptive mid-night, percentage, etc.)
- Customized Control Protocol

■ Lifetime vs. Case Temperature

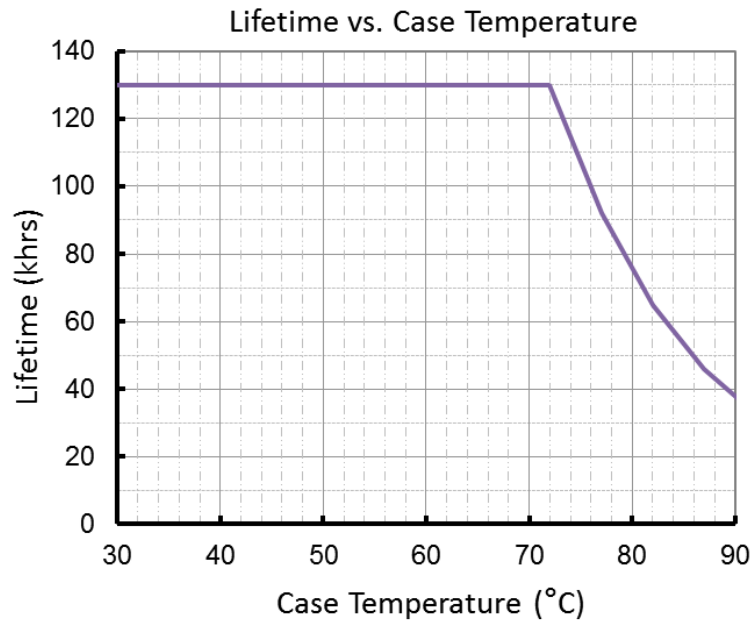


(End of Life: Maximum Failure Rate=10%)


■ Power Factor vs. Load

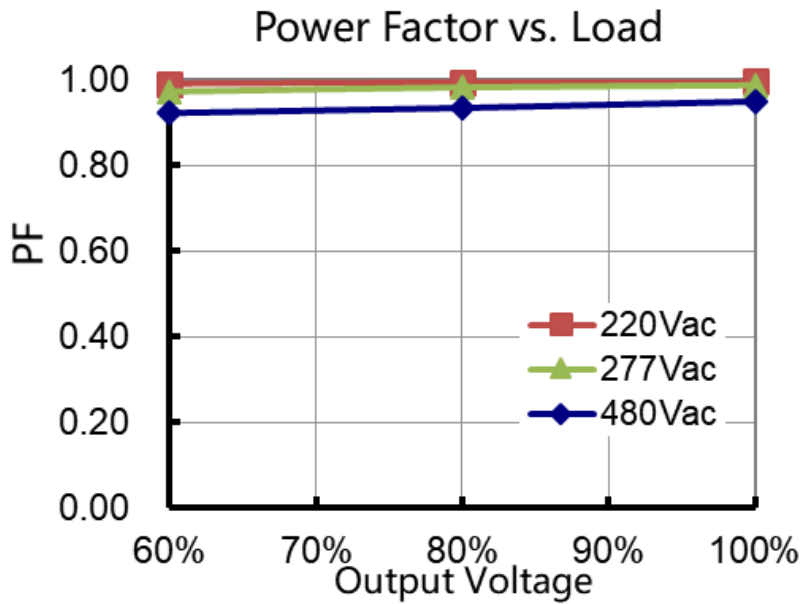


■ THD vs. Load

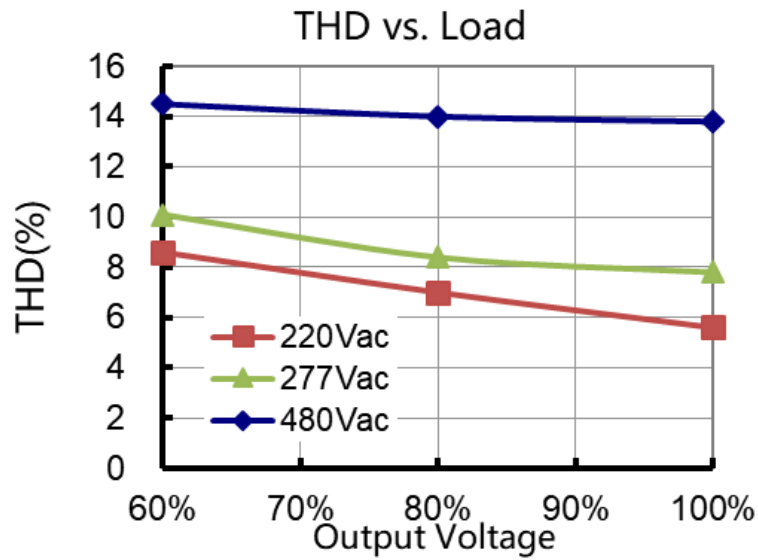

■ Efficiency vs. Load (14A Model)

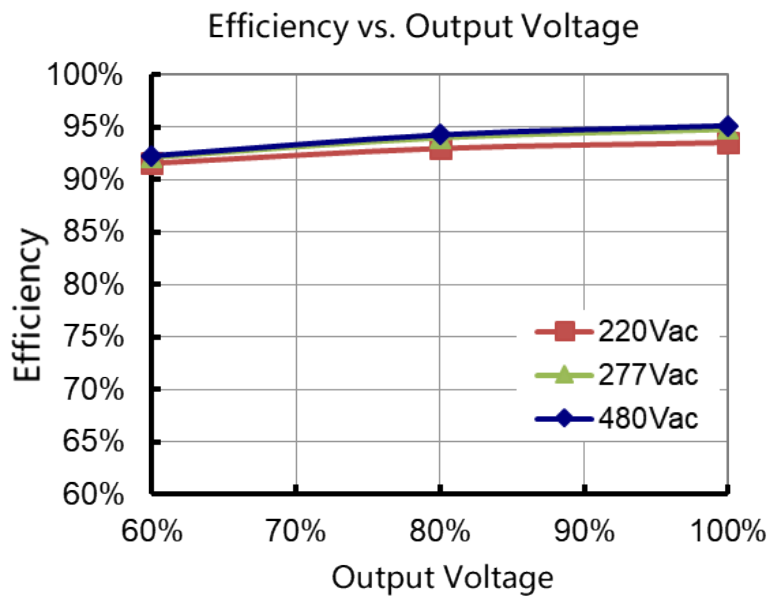

Inrush Current

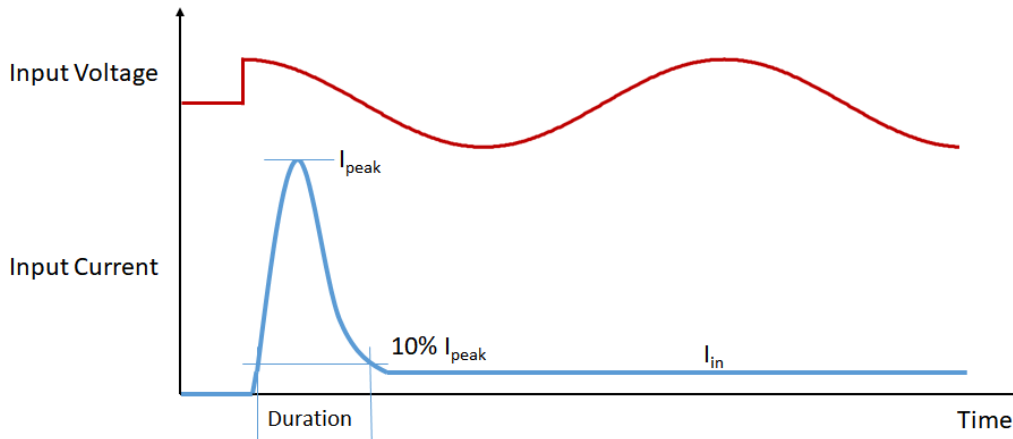


Input Voltage	I_{peak}	Duration
277Vac	7.1A	19.3mS
380Vac	10.5A	14.1mS
480Vac	13.3A	15.4mS

Please contact with us for MCB calculation and waveforms.

Dielectric Strength


Unit: Vac	Input	Output	Dimming	Case
Input	-	3920	3920	1960
Output	3920	-	1960	1960
Dimming	3920	1960	-	1960
Case	1960	1960	1960	-

Tc Point

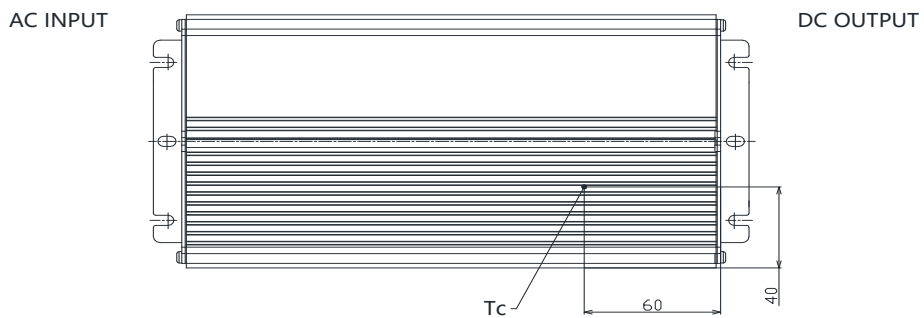


■ Packaging Information

Typical Carton Dimension(L×W×H)	490×370×140 mm
Positioning plate	2pcs/carton
Shield Board	1pcs/carton
LED Drivers	4pcs/carton

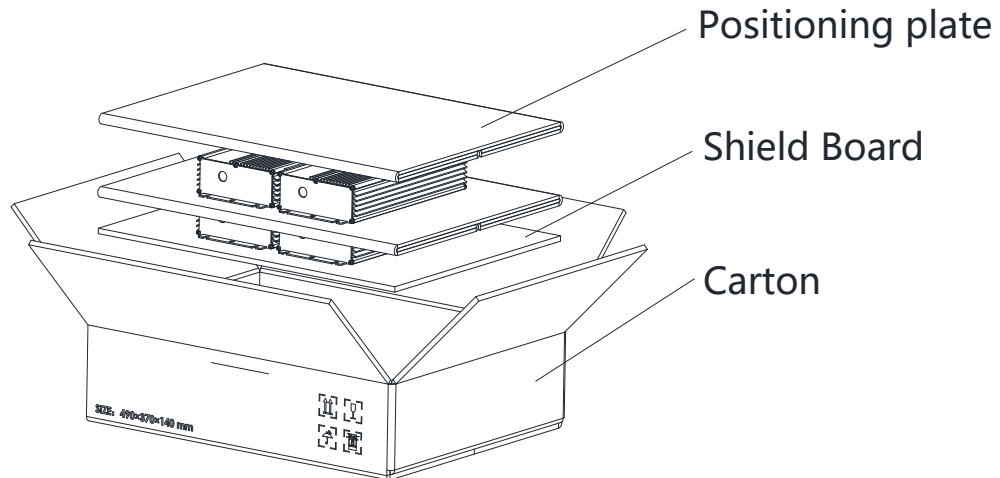


Mechanical Design


TLD-600-Cxxx-NN/TRU (UL Cable)

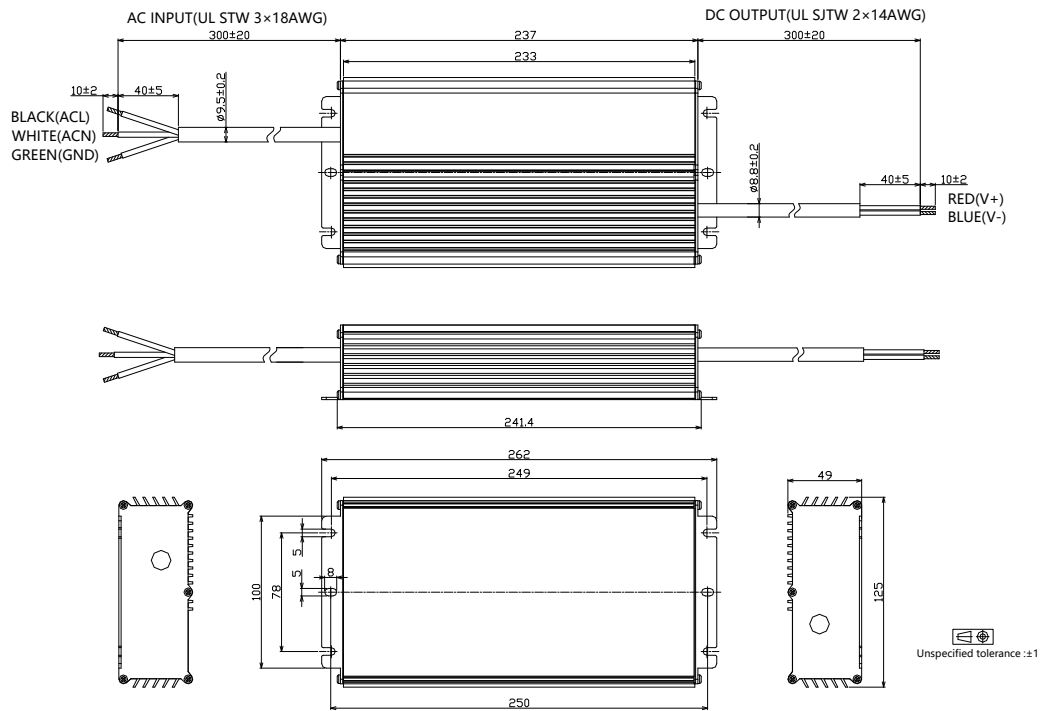


TLD-600-Cxxx-DN/DRU (UL Cable)

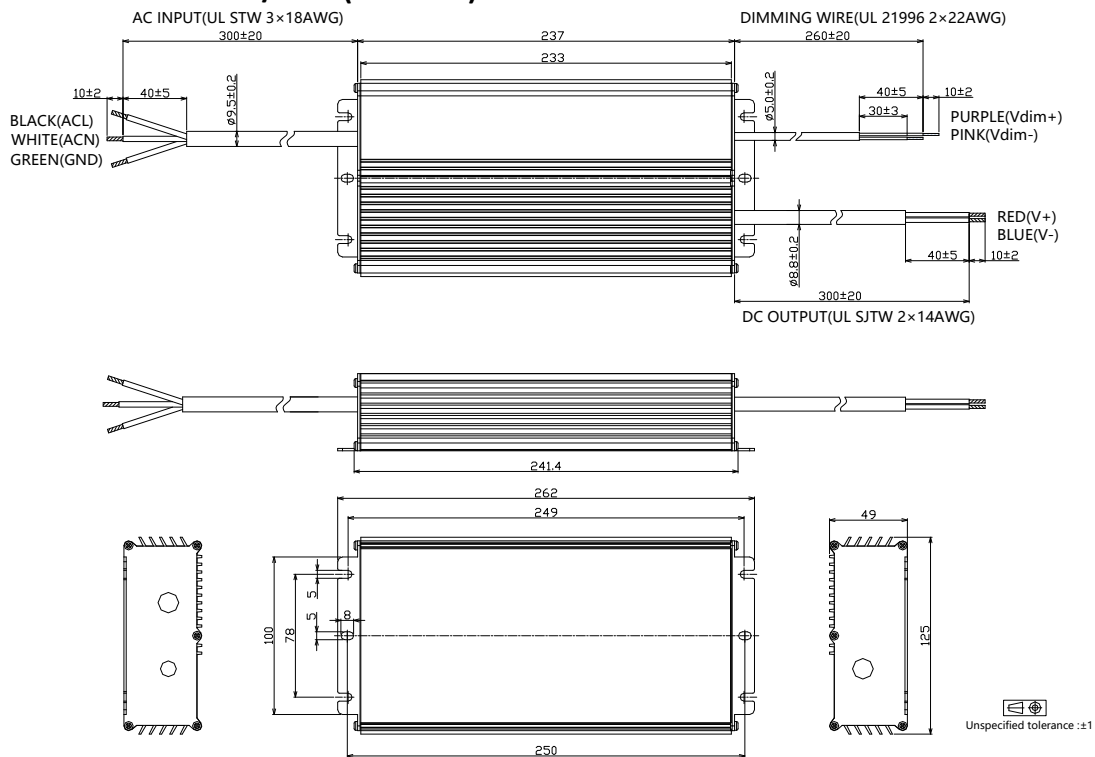


- TLD-600-Cxxx-ERU (UL Cable)

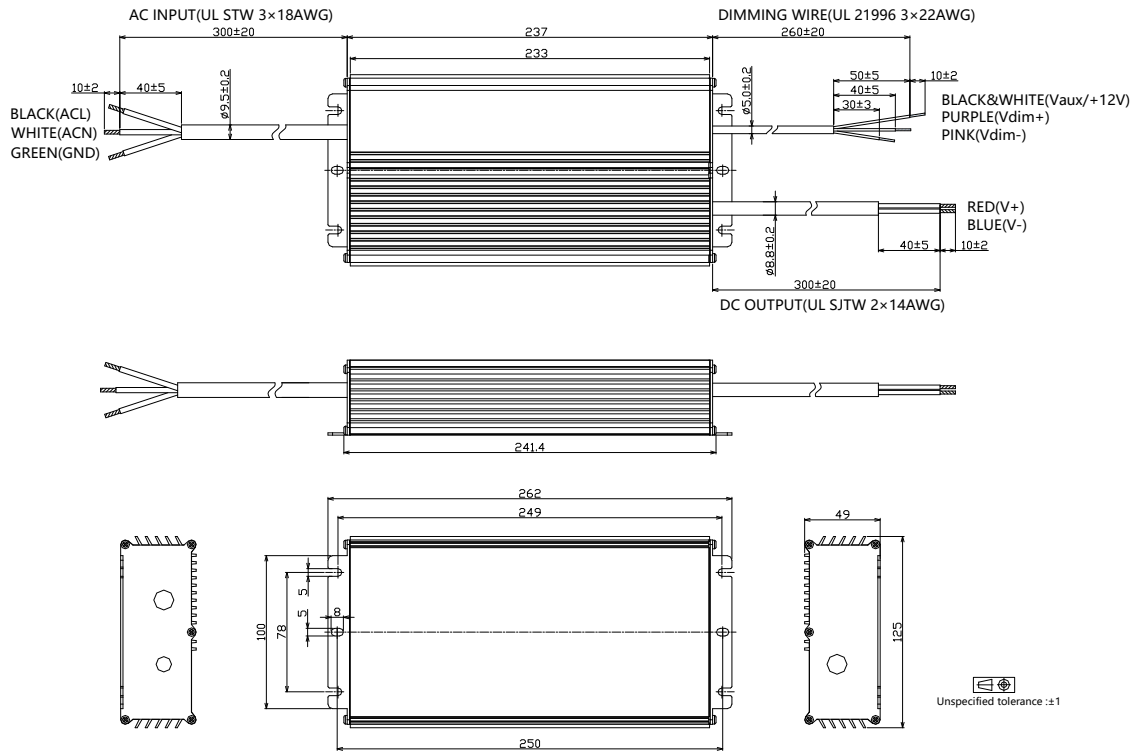


- TLD-600-Cxxx-ARU (UL Cable)

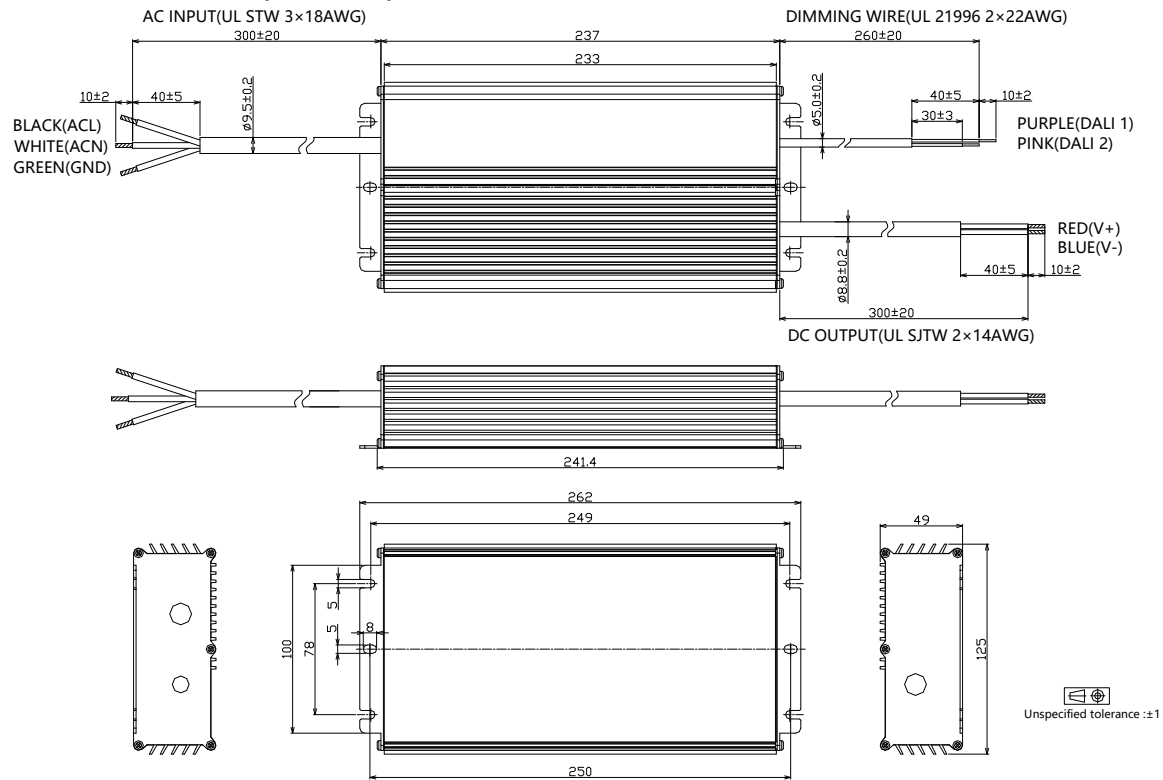


- TLD-600-Cxxx-MRU (UL Cable)

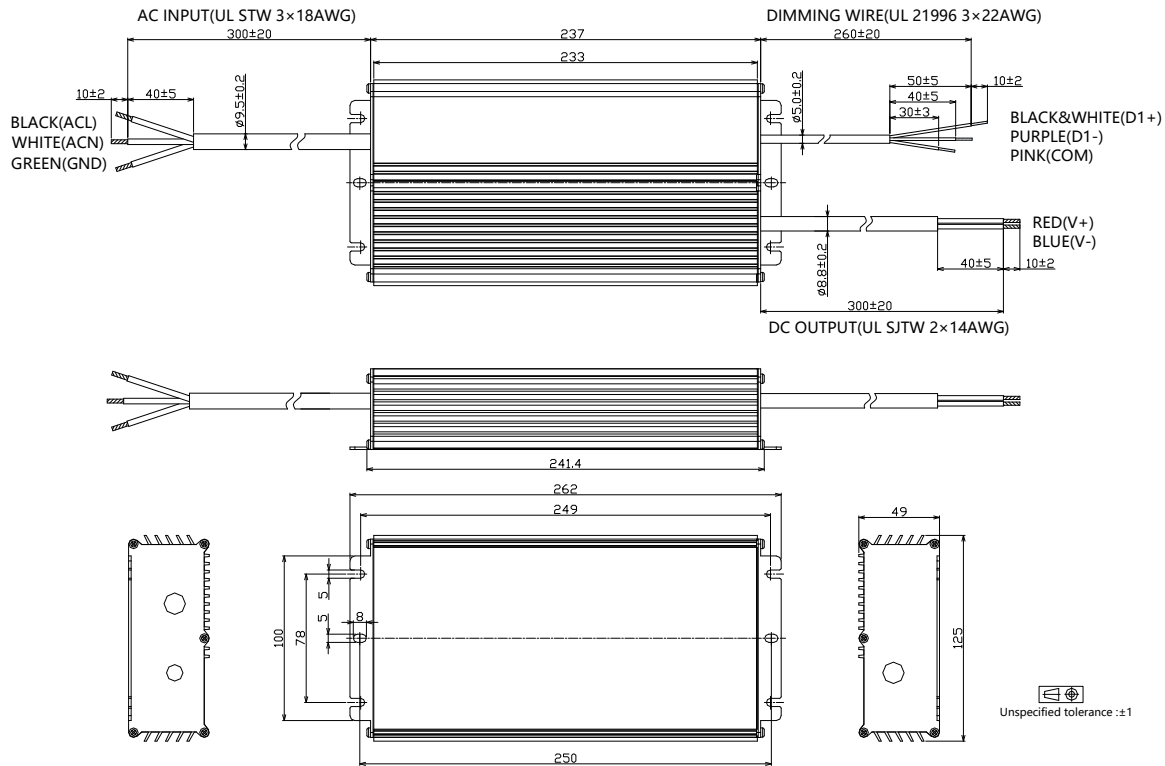


- TLD-600-Cxxx-NN/TRS (VDE CABLE, MODELS WITH HIGHER THAN 60V OUTPUT VOLTAGE)

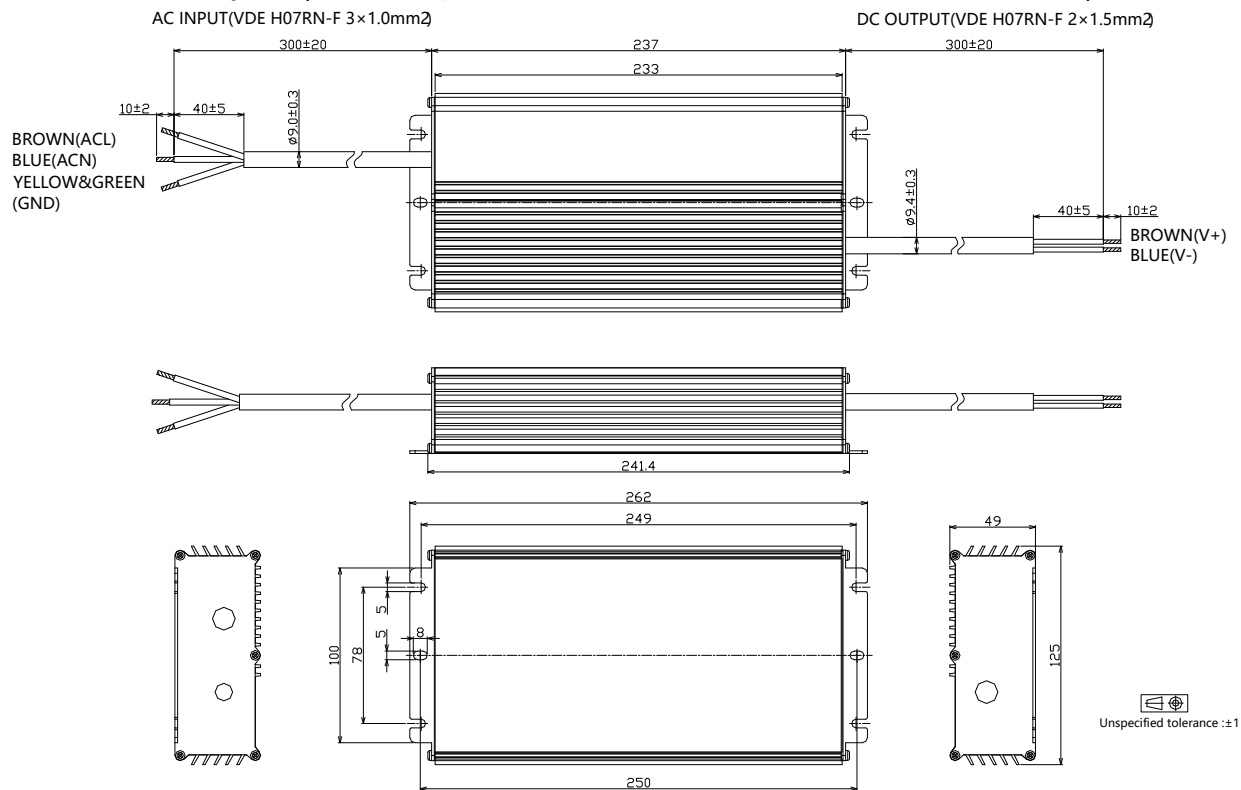


- **TLD-600-Cxxx-NN/TRS** (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)

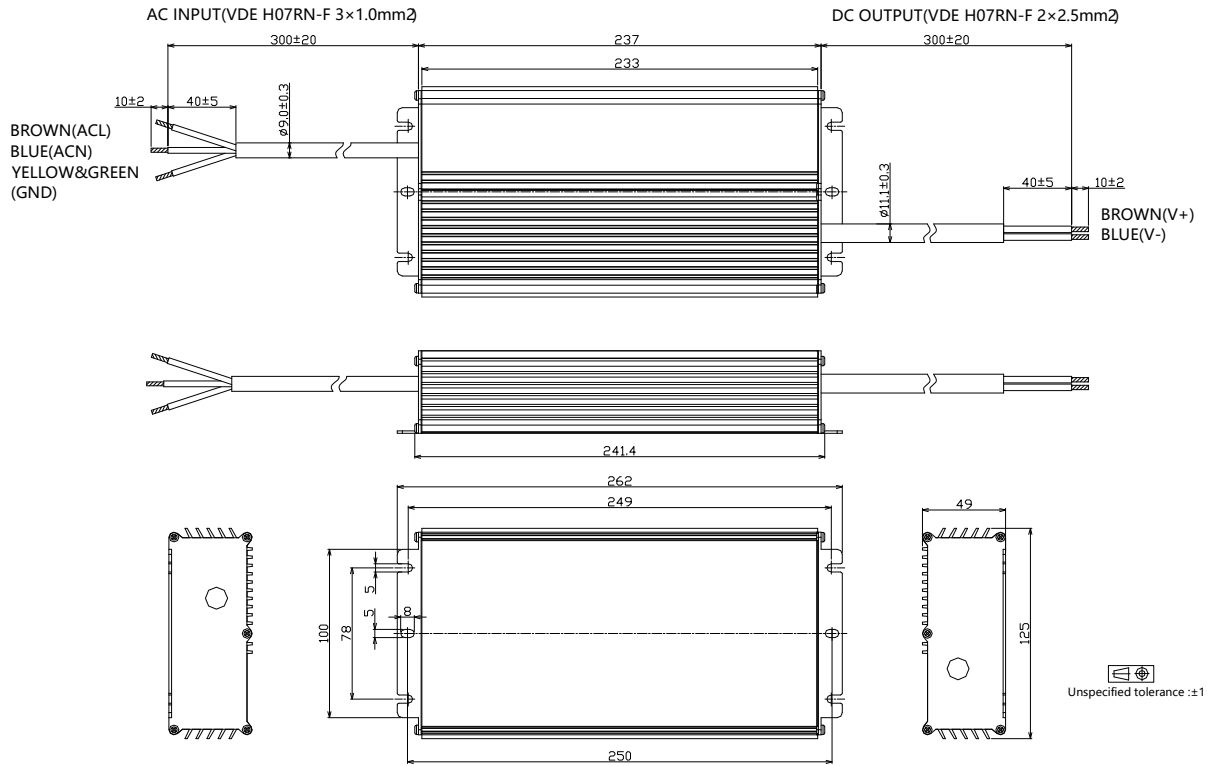


- **TLD-600-Cxxx-DN/DRS** (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)

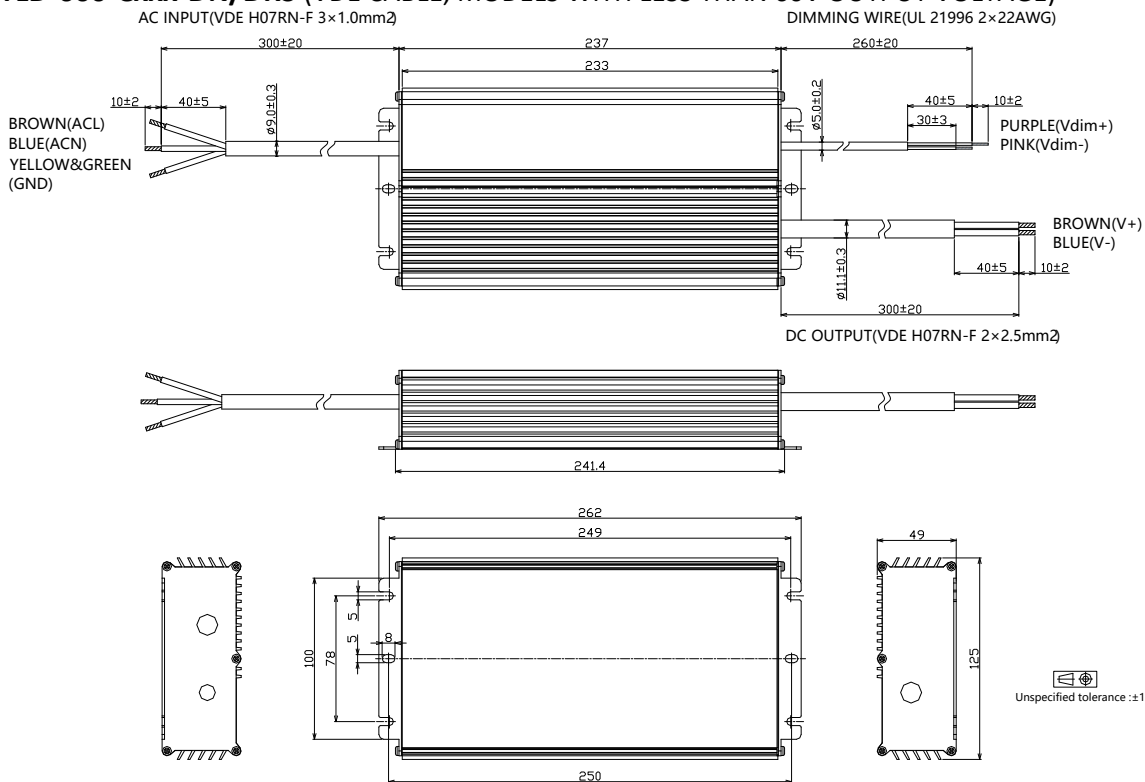


- **TLD-600-Cxxx-EN/ERS** (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)

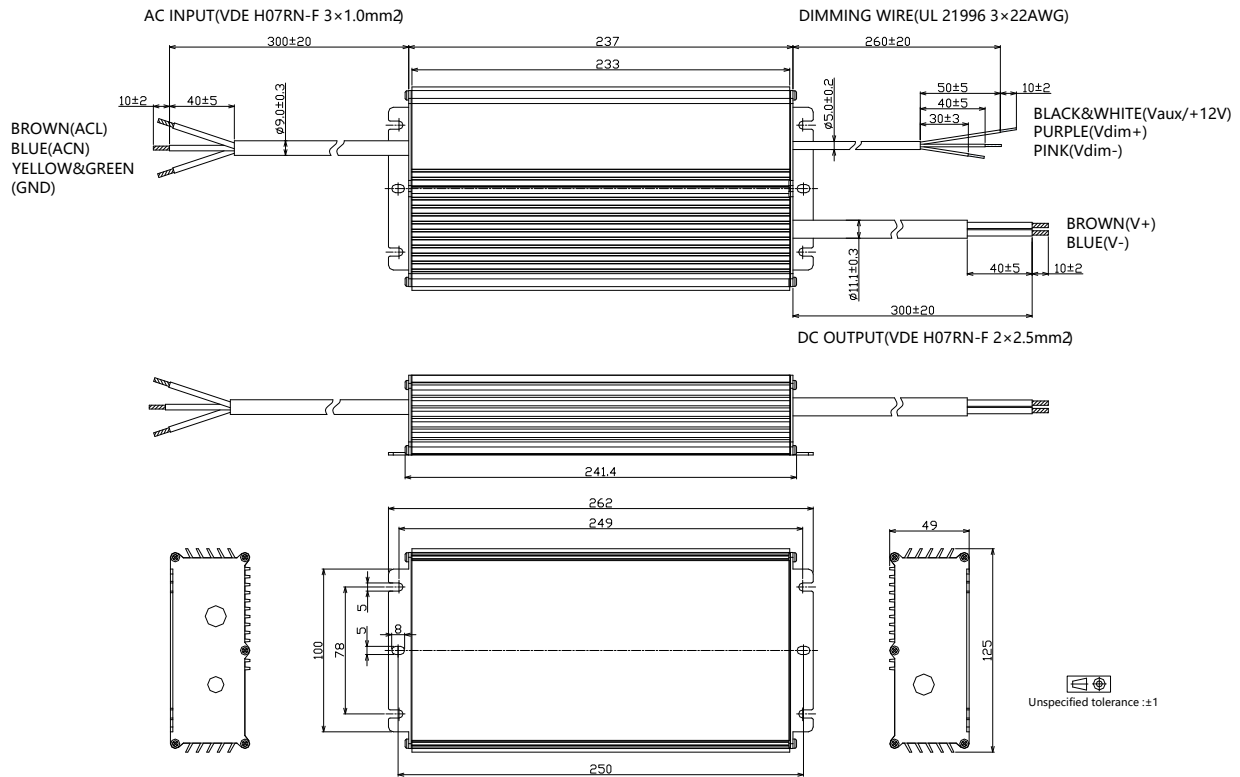

- **TLD-600-Cxxx-ARS** (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)

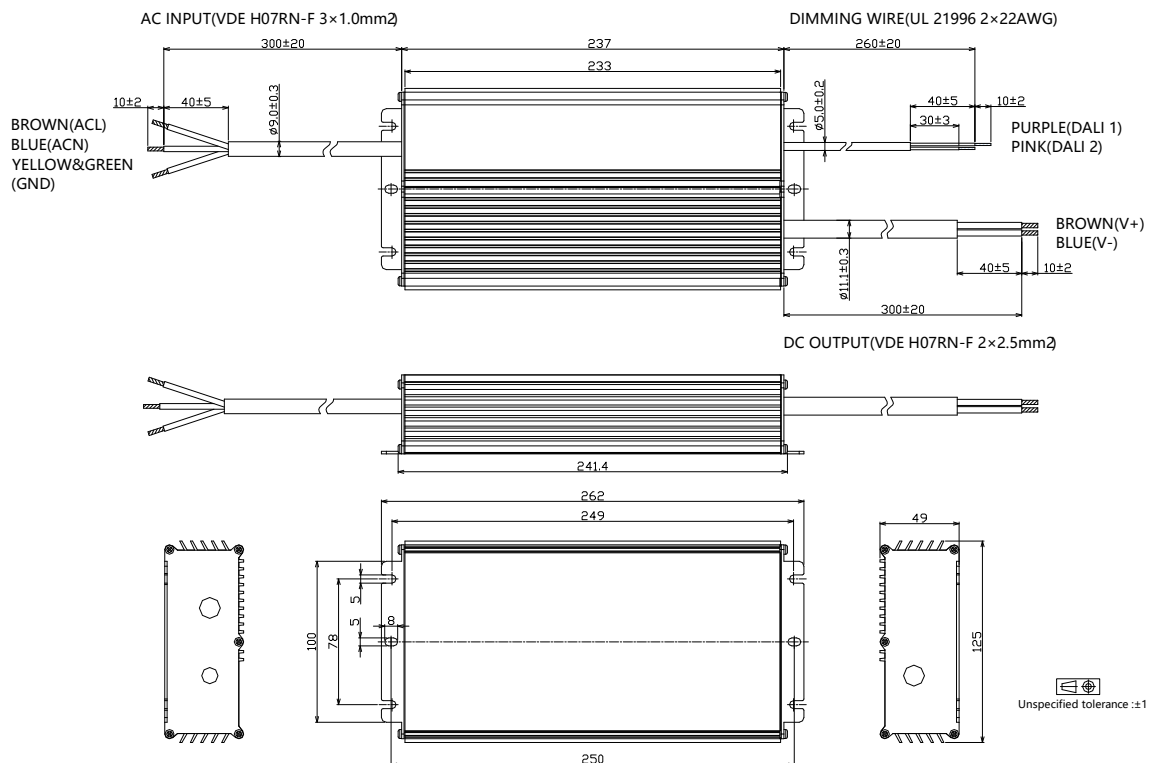


- **TLD-600-Cxxx-MRS (VDE CABLE, MODELS WITH LESS THAN 60V OUTPUT VOLTAGE)**

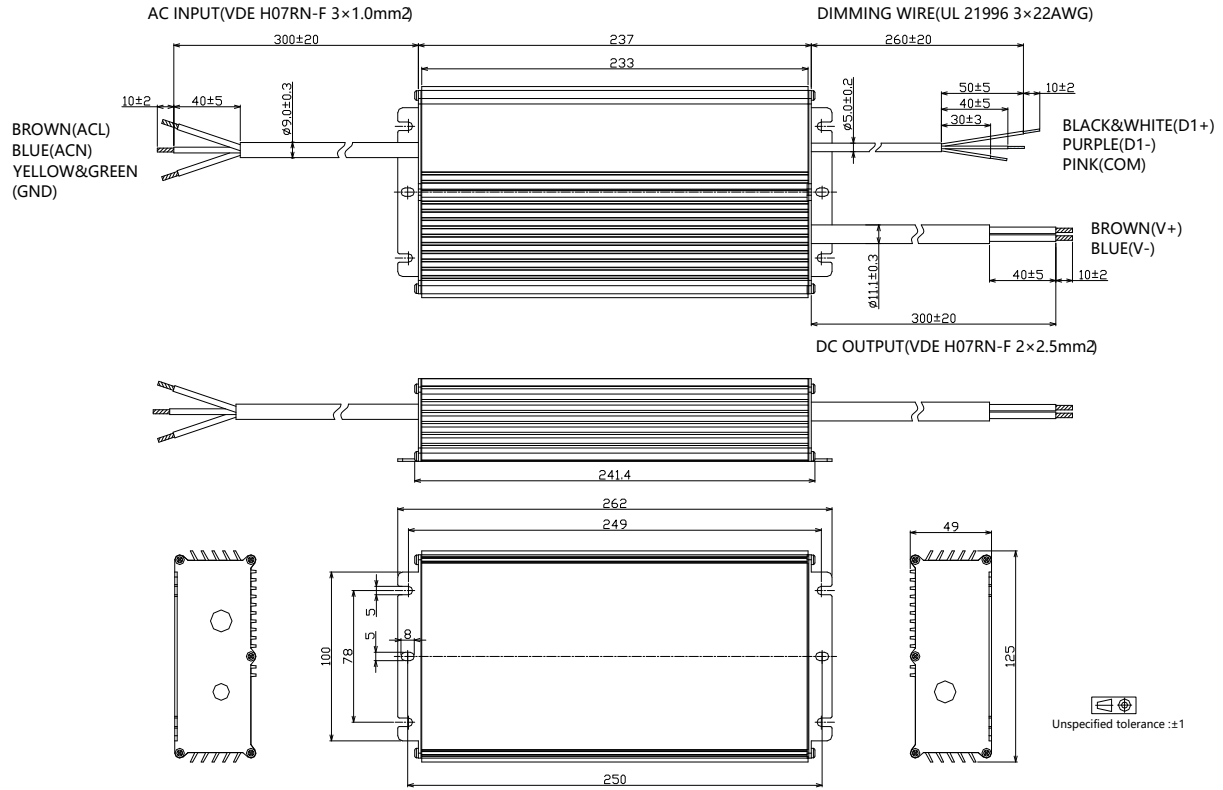

600W, 200-480Vac Input, Long Life High Quality Driver

- Customized Functional End Cap Version

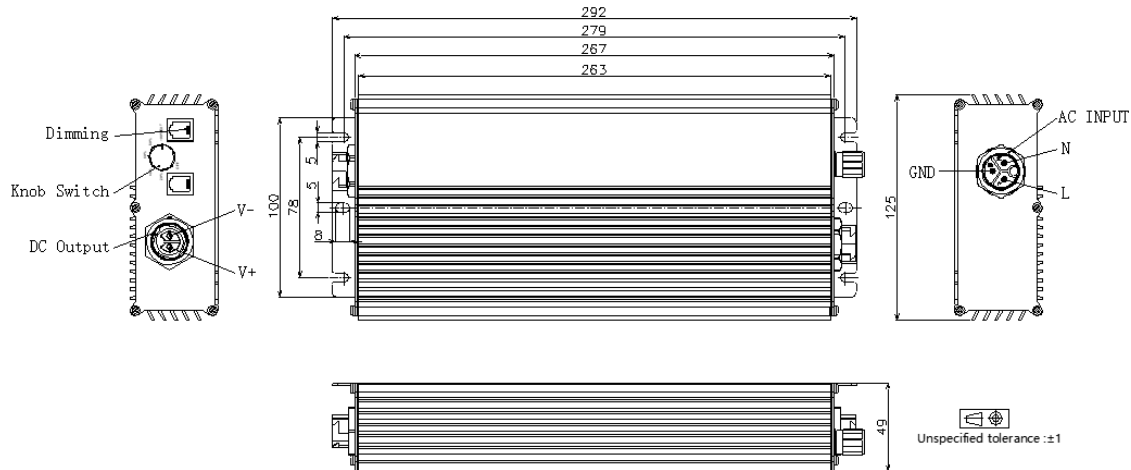


- Add suffix #abcd00 to the end of part number to indicate different configuration. Please refer to product application note AN06 or contact with us for more like **active daisy chain, master mode and button dimming** etc.

Item	Value Definition	Description
Input	a	F: M19 waterproof connector P: C14 plug N: Same cable as standard version
Output	b	F: M19 waterproof connector, 2 pin N: Same cable as standard version
Dimming	c	F: M12 waterproof connector R: RJxx (xx=25,14,12,11) connector x 2 S: 3.5mm multi-media plug N: Same cable as standard version
Knob	d	K: Knob with steps B: Knob without steps N: No knob

- RJ25 Pin Description (can be customized according to control system)

Pin	Description
1,6	12V Aux-power
2,5	Dim+
3,4	Dim-/RTN



- Knob Description

Position	Description
100%/EXT	If there is no external control, 100% output. If there is external control, output is controlled by external signal.
Off,20%,40%,60%,80%	External signal invalid.



■ Output Operation Range

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C14A	14000	600	30	44	1400
	13000	600	30	47	1300
	12500	600	30	49	1250
	12000	600	31	51	1200
	11500	600	32	53	1150
	11000	600	33	55	1100
	10500	578	33	55	1100
	10000	550	33	55	1100

	1100	61	33	55	1100

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C860	8600	600	42	70	860
	8500	600	42	71	850
	8400	600	43	71	840
	8200	600	44	73	820
	8000	600	45	75	800
	7800	600	46	77	780
	7600	600	47	79	760
	7400	600	49	81	740
	7200	600	50	83	720
	7000	600	51	86	700
	6800	600	53	88	680
	6600	600	55	91	660
	6400	600	56	94	640
	6200	600	58	97	620
	6000	600	60	100	600
	5800	580	60	100	600
	5600	560	60	100	600

	600	60	60	100	600

600W, 200-480Vac Input, Long Life High Quality Driver

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C600	6000	600	60	100	600
	5800	600	62	103	580
	5600	600	64	107	560
	5400	600	67	111	540
	5200	600	69	115	520
	5000	600	72	120	500
	4800	600	75	125	480
	4600	600	78	130	460
	4400	600	82	136	440
	4200	600	86	143	420
	4000	571	86	143	420
	3800	543	86	143	420
	3600	514	86	143	420
	3400	486	86	143	420
	3200	457	86	143	420
	3000	429	86	143	420

	420	60	86	143	420

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C420	4200	600	86	143	420
	4100	600	88	146	410
	4000	600	90	150	400
	3900	600	92	154	390
	3800	600	95	158	380
	3700	600	97	162	370
	3600	600	100	167	360
	3500	600	103	171	350
	3300	600	109	182	330
	3100	600	116	194	310
	3000	600	120	200	300
	2900	600	124	207	290
	2800	600	129	214	280
	2700	579	129	214	280
	2600	557	129	214	280

	280	60	129	214	280

■ Revision History

Revision	Date	Contents
I	2022-03-22	<ol style="list-style-type: none">1. Index page added2. Reduced dimming interface sourcing current3. DALI 2.0 compatibility added4. Programming instruction added5. Inrush current data added6. Tc point position indication added7. Dielectric strength level added8. Packaging information added9. Mechanical design change with dimming cable color10. Revision history added